


COMPARE 150AMO DIMENSIONS AND CAPACITY

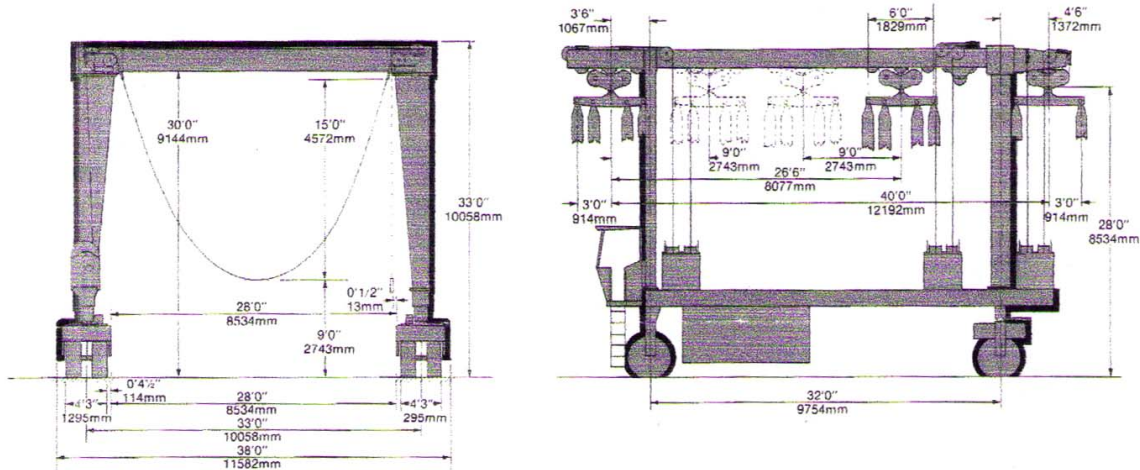

SPECIFICATIONS

	U.S. MEASURE	METRIC
Slings —		
Nylon... 12" x 44' — 2 ply	10	
Travel Speed Low Speed	60 f.p.m.	18.3Mpm
High Speed	100 f.p.m.	30.5Mpm
Rated Lifting Capacity	300,000 lbs.	136,100 Kg
Hoisting Speed No Load	10.5 f.p.m.	3.2Mpm
Loaded	4.5 f.p.m.	1.4Mpm
Number of Hoists	6	6
Hoist Cable Size 6x19xIPS IWRC ..	3/4"	19.1mm
Number of parts of line per hoist ...	4	4
Hoist block travel below grade (standard)	5'0"	1524mm
Additional cable required for one foot of hoist block travel below standard	24'0"	7315mm
Hoist block travel below grade maximum (optional)	20'0"	6096mm
Sling length (end to end)	44'0"	13,411mm
*Gradeability at standard speed (full load)	6%	6%
Approximate Shipping Weight	105,000 lbs.	47,628 Kg
Turning Radius, inside wheel at 90°	0	0
Turning Radius, outside	52'0"	15,850mm
Tire Pressure	150psi	10.6 Kg/Cm ²
Tires: (8) 50x20x20 — P.R. (min.) aircraft type with new lug type recap		

Engine: Std. —
 John Deere 6068T 173 hp @2200rpm
 Optional — General Motors 4-71N Series
 Diesel — 153 hp @2000rpm
 Gradeability shown is for concrete or asphalt. For gradeability on other surfaces deduct as follows: Hard packed ground or gravel...2%, Loose gravel...2 to 7%, Mud...2 to 13%, Soft sand...4 to 13%

STANDARD EQUIPMENT

150AMO standard equipment includes J.D. 6068T Diesel Engine; (8) 50 x 20 x 20 — 32 P.R. (min.) aircraft type tires with new recap lug type tread; open operator compartment with waist high enclosure and top canopy; instrument panel contains ignition switch, horn button, hourmeter, voltmeter, oil pressure gauge, engine temperature gauge; 6 planetary drive hoist winches, automatic load equalizing hoist system; 6 spreaders and 10 nylon slings; travel warning alarm; load indicator gauges; and power sling block adjustment.

Marine Travelift parts, sales and service are available on a localized basis through a network of authorized distributors located in key areas throughout the world.

Specifications subject to change without notice.

MARINE  **TRAVELIFT**™